


Existing solar se smart energy management tak

Purana panel aur inverter rakho. Compatible data jodo. Safe actions lo. Extra benefit verify karo.


- Existing power
- New hardware / data
- AI / planning
- Approved control
- Safety / hold
- User benefit

01 PEHLE SITE SURVEY: kya already available hai?

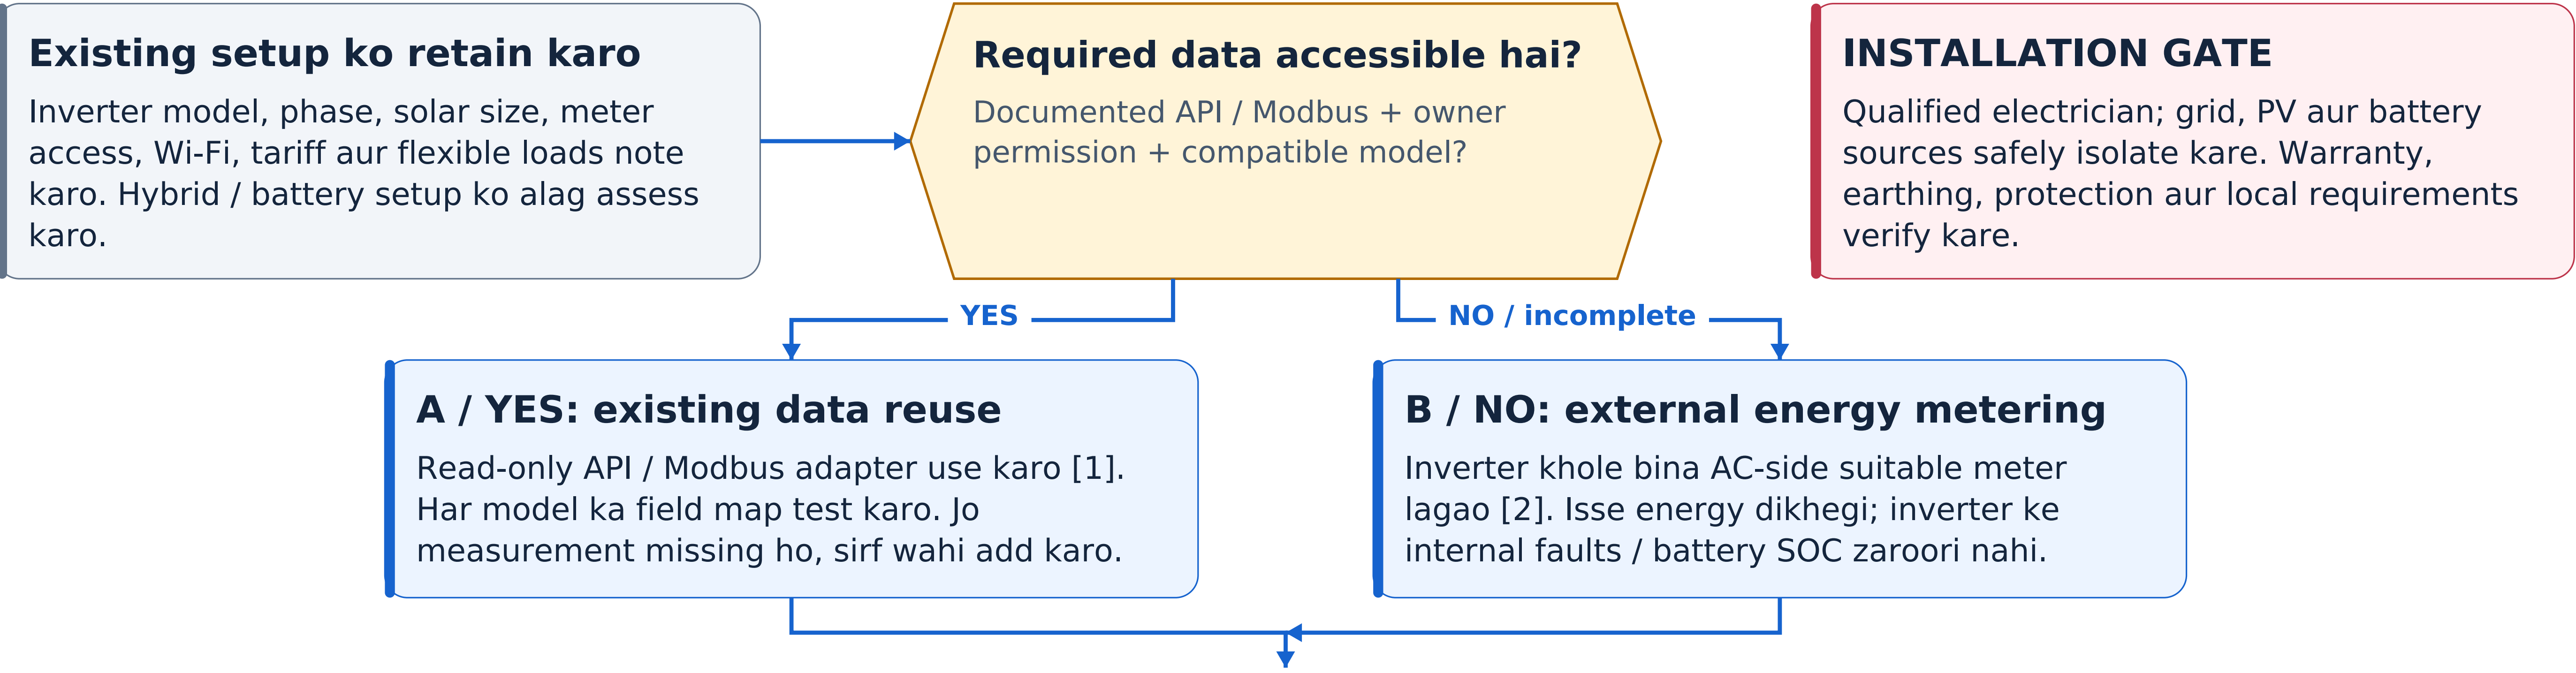

02 KAHAN KYA LAGEGA? Existing power path + new measurement points


Concept: single-phase, grid-tied home without battery. Yeh terminal-level wiring guide nahi hai.

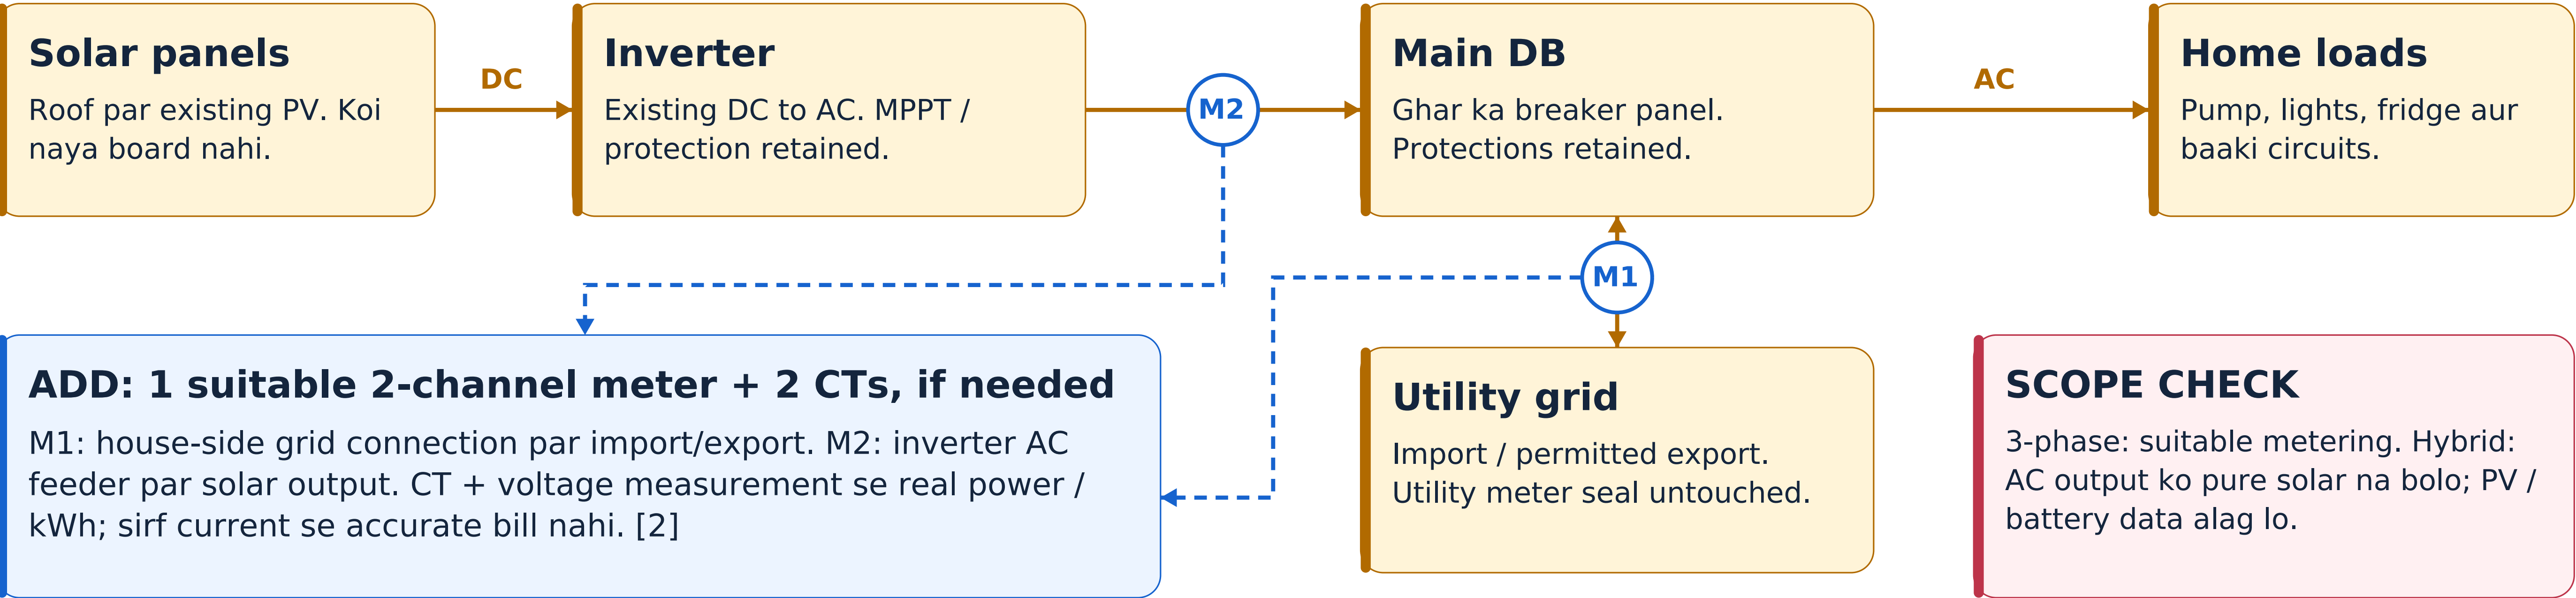

Simple no-battery case: ghar ka use = solar AC + grid import - grid export; same-time, consistent readings use karo. Total meter se har appliance ka exact use nahi milta; uske liye plug / sub-meter chahiye.


03 HARDWARE SE APP TAK: connection, readings aur storage

Blue dashed = data link. Device readings manufacturer limits ke andar sample karo; cloud polling ko live mat bolo.

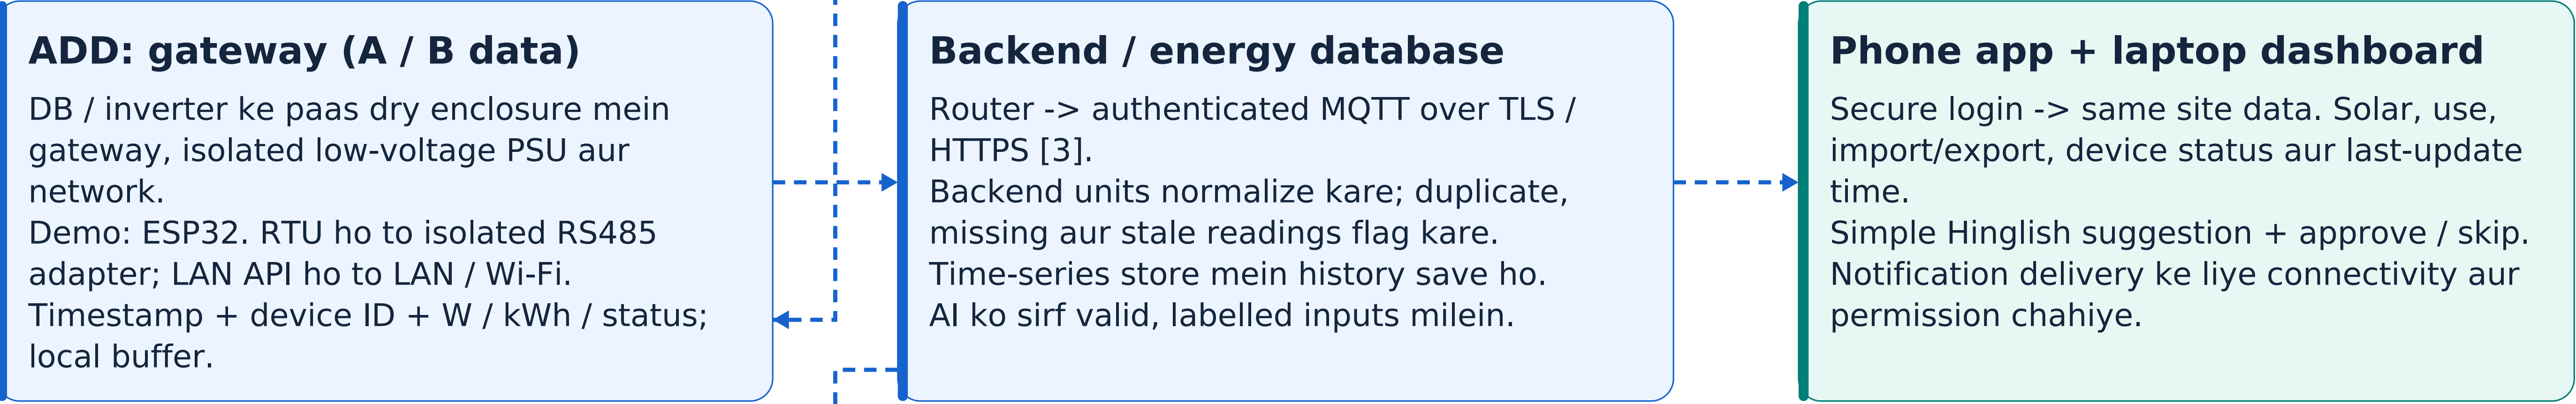

Gateway electricity carry ya source-switch nahi karta. Kuch supported network meters direct backend se bhi connect ho sakte hain.


04 AI KYA KAREGA? Prediction + rules + permission + measured feedback

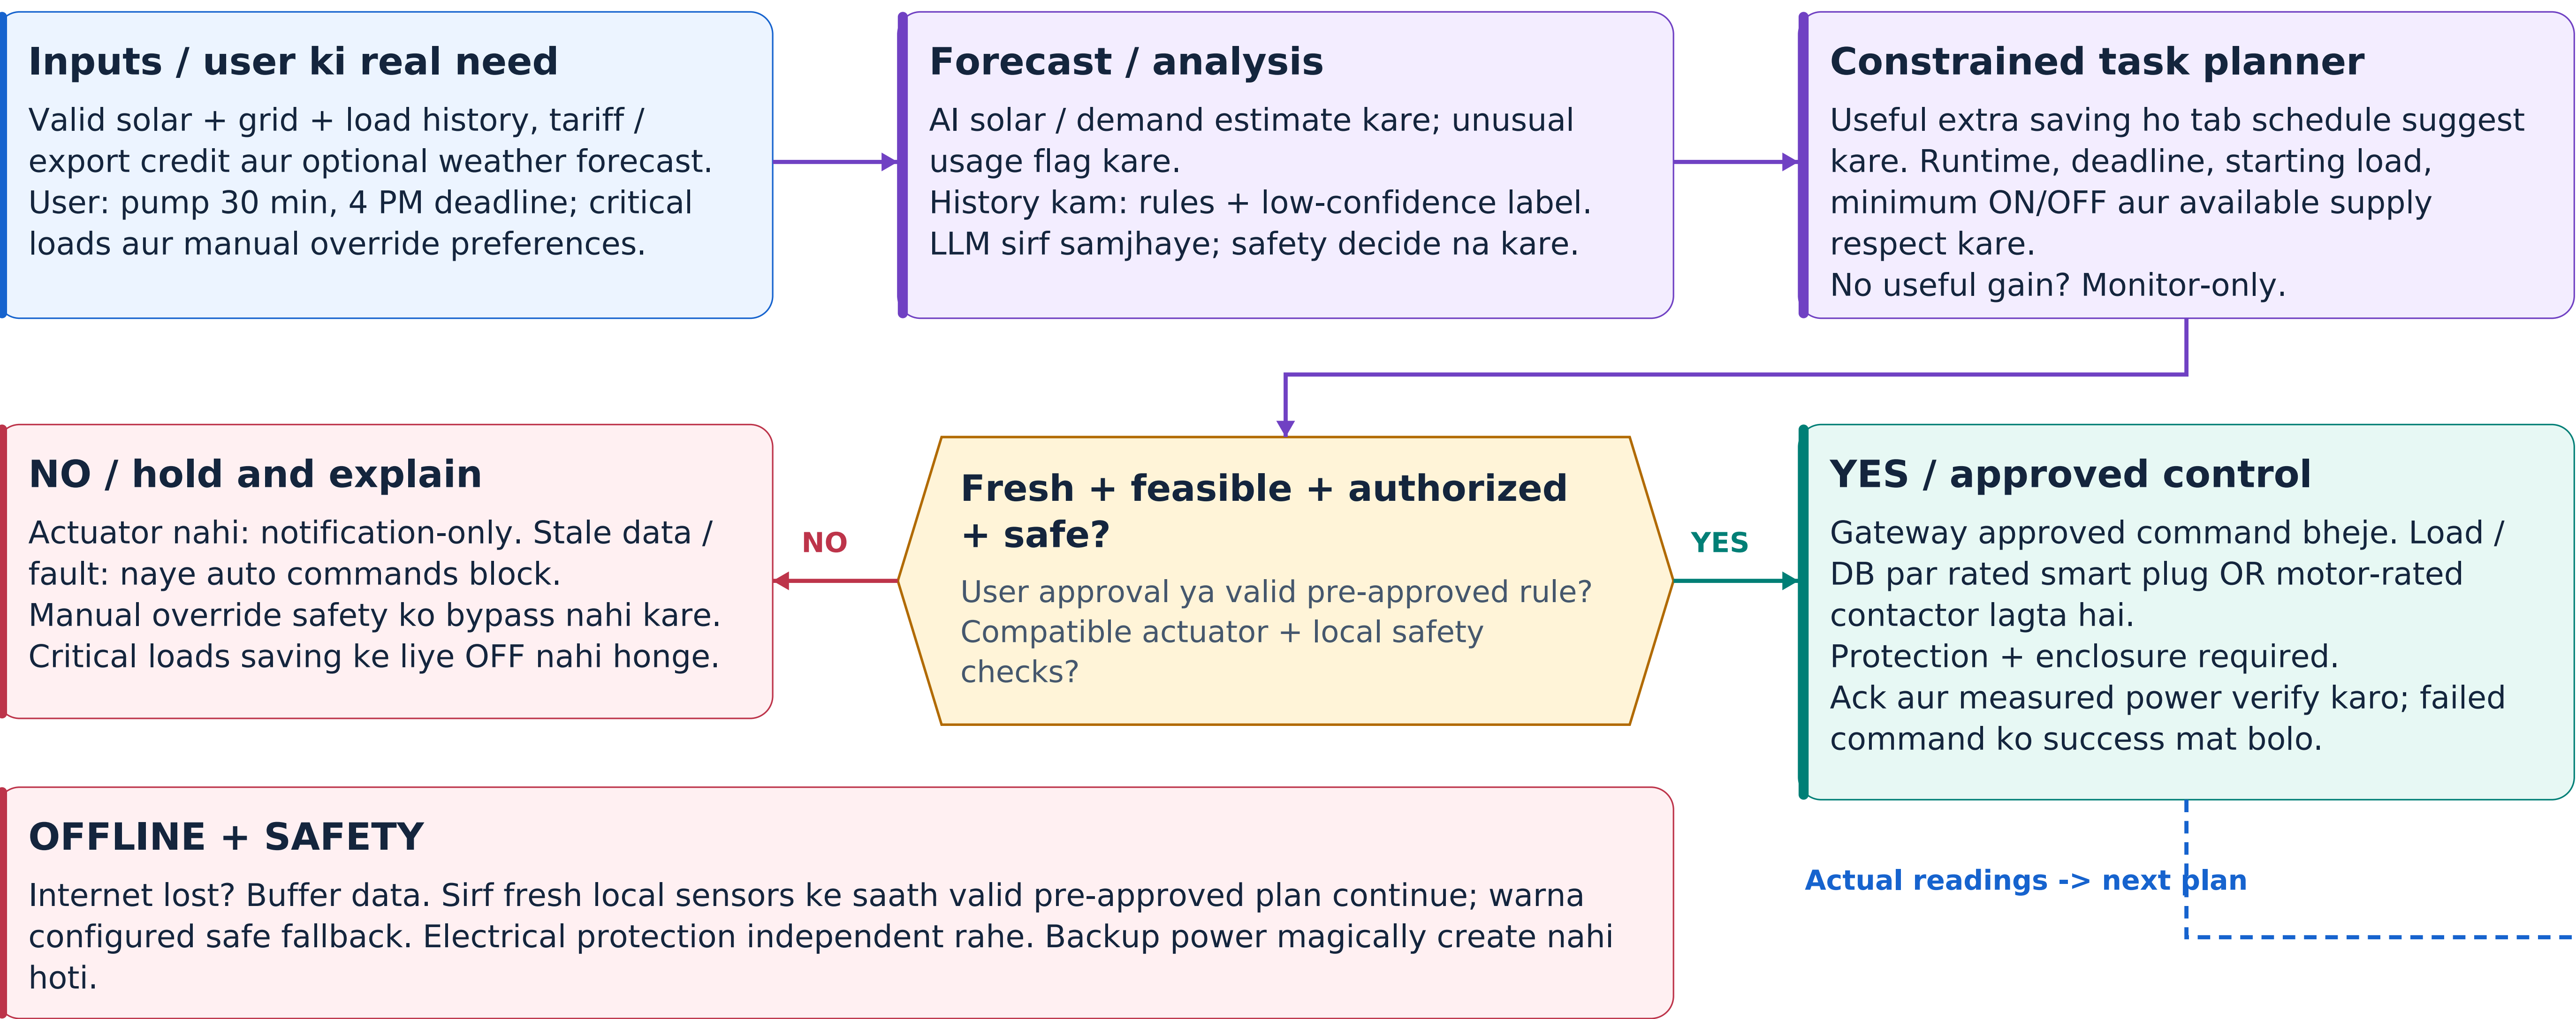


05 USER KO FAYDA KAB HOGA? Upgrade ko pehle prove karo

Compare with a basic / manual setup, not with every product. Advanced systems already offer similar features. [4]

USER NEED	BASIC / MANUAL SETUP	URJASETU PROPOSAL
Kaam time par ho	User manually time choose kare.	Deadline-based plan + approval; comfort aur essential loads protected.
Ek jagah clarity	Basic display / separate views.	Supported sources ka common dashboard + simple explanation + last update.
Extra saving ka proof	Solar saving aur optimizer saving mix ho sakti hai.	Same-work baseline ke against incremental Savings Receipt; estimates labelled.

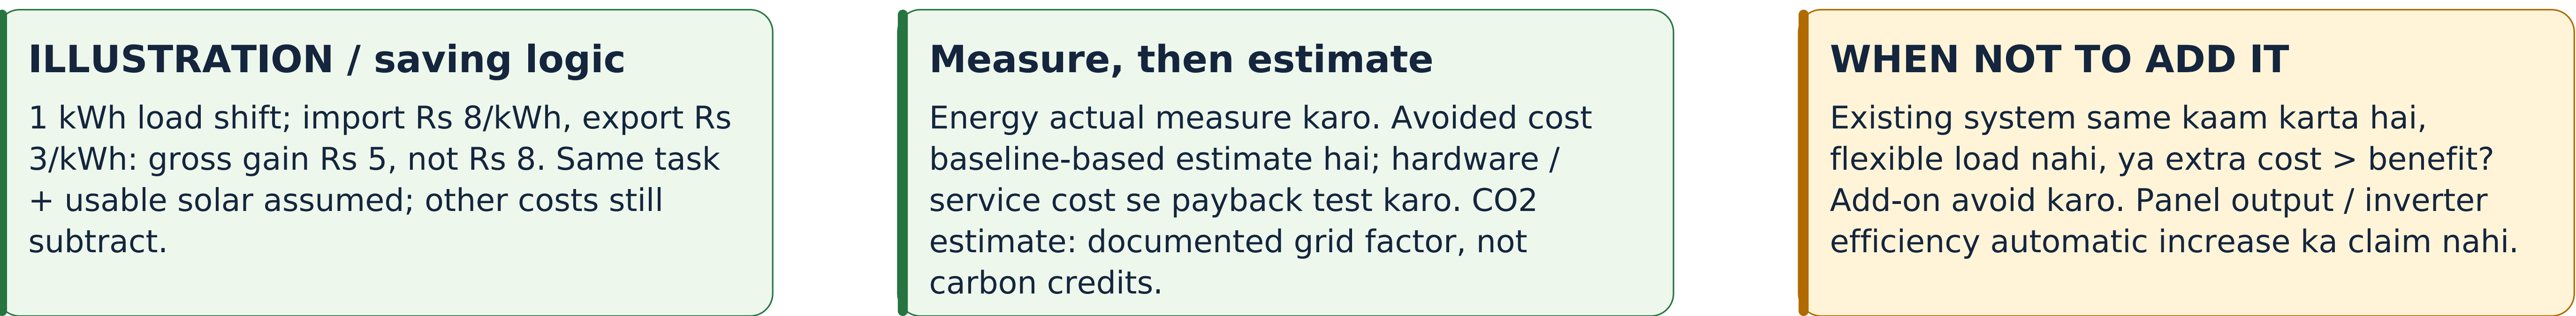

06 24-HOUR DEMO: same software flow, low-voltage hardware only

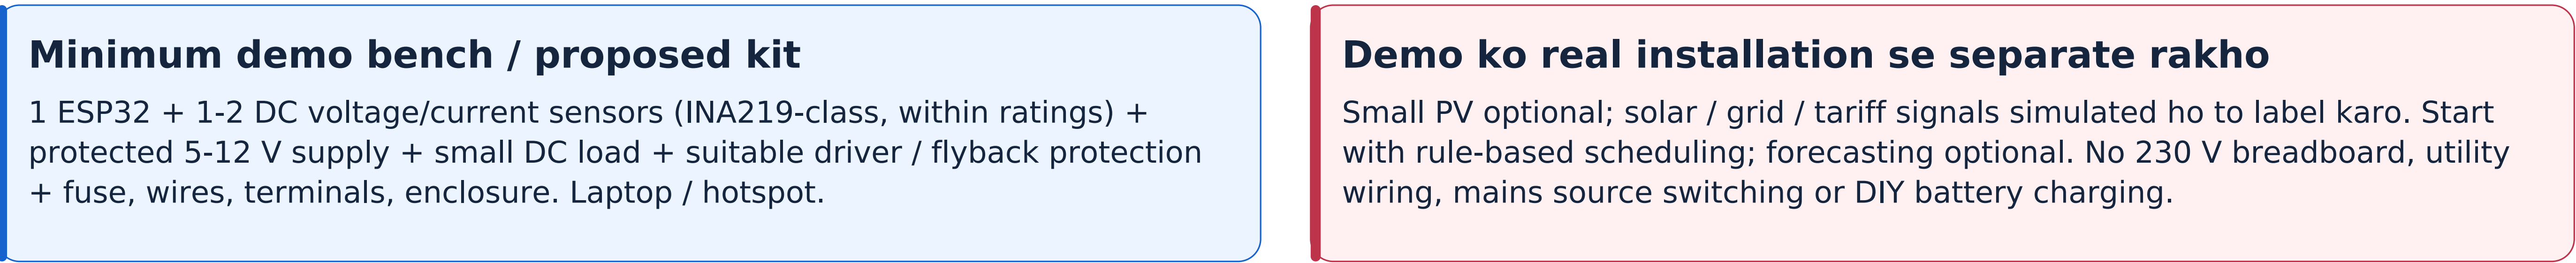

Sources / verified examples (click in PDF): [1] Fronius Solar API [2] Shelly meter documentation [3] Espressif MQTT [4] SolarEdge ONE

Concept architecture, not a certified installation design. Exact compatibility, component ratings and local installation approvals must be verified.